

MX1D

ShoeBoxPC • INTEL Coffee Lake • Modulable • x2 PCIe

Processeur INTEL Core I3/I5/I7 (35Watts & 65 Watts)

Chipset INTEL Coffee Lake C246

Mémoire SODIMM DDR4 64GB Max

1 PCIe x16 • 1 PCIe x1

1 HDMI • 1 DP • 1 DVI-I

2 ports RS232 • 6 USB 3 • 2 USB 2

2 ports RJ45 INTEL I219-LM / I210-IT

Alimentation 9V~48V DC • 110~220 AC



Système

Chipset	INTEL Coffee Lake C246
Processeur	Core I7-9700 / 9700T Core I5-9500 / 9500T Core I3-9100/ 9100T
Proc. Vidéo	INTEL HD 630
Modularité	1 PCIe 3.0 x16 • 1 PCIe 3.0 x1 2 miniPCIe • 1 M.2 2230
Stockage	x3 2.5 " (RAID 0,1,5,10) • 1 M.2 2280
Mémoire	64 GB SODIMM DDR4 Max
Entrées / Sorties	1 HDMI • 1 DP • 1 DVI 6 USB 3 • USB 2 2 RS232 (RS232/422/485) 2 RJ45 (INTEL I29LM + I210IT) 1 sortie / entree son Jack 1 DC bornier
Alimentation	AC 100~240V, 50Hz/60 Hz, DC 9V~36V

Communication

Ethernet	2 RJ45 INTEL I219LM + I210IT
WIFI (option)	WiFi 802.11 a/b/g/n/ac (2.4G+5.8G)
Bluetooth (Option)	BT 5
3G/4G (Option)	LTE FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8



Environnement	
Temp. fonction.	-40°C ~ 70°C
Temp. Stockage	-40°C ~ 85°C
Humidité	10%~90%
Certification	FCC / CE

Dimensions / Construction	
Matériau	Aluminium
Dimensions	268 x 246 x 128 mm
Poids	Environ 7 kg
Fixation	Equerres de fixation

Modules d'extension

Carte Graphique

Double slot PCIe x16 Jusqu'à 120W

MS-48CDN-DT10

4 x RS232 / 422 / 485
4 x DI / 4 x DO

MS-04LAN-R10

4 x Intel I210-IT RJ45

MS-04LAN-M10

4 x Intel I210-IT M12

MS-04POE-R10

4 x PoE+ Intel I210-IT RJ45

MS-04POE-M10

4 x PoE+ Intel I210-IT M12


ME-02POE-R10

2 x PoE+ Intel I210-IT RJ45

MS-01IGN-S10

Carte ignition véhicule (12/24V)

Ventilation

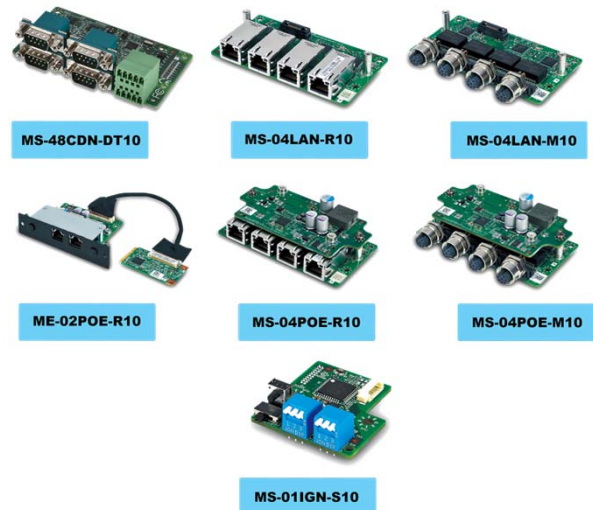

Options / Accessoires



Communications



Communications